


SW-04U (UNI SWITCH- UNSEALED CONNECTOR)

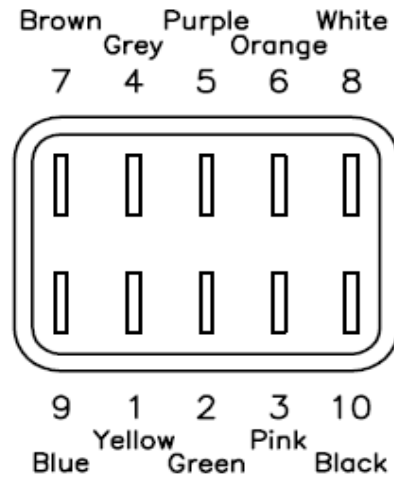

SPECIFICATIONS:

Rating:

5A-24V/7A -12VDC

Contact Resistance:

50m ohm Max.

Insulation Resistance:

DC 500V 100M ohm Min.

Dielectric Strength:

AC 1000V 1 minute

Operation Temperature:

-20 deg Celcius ~ 85deg Celcius

Switch Function:

10WAY PDPT (ON)/OFF/(ON)(LED INDEPENDENT)