


DIMENSIONS

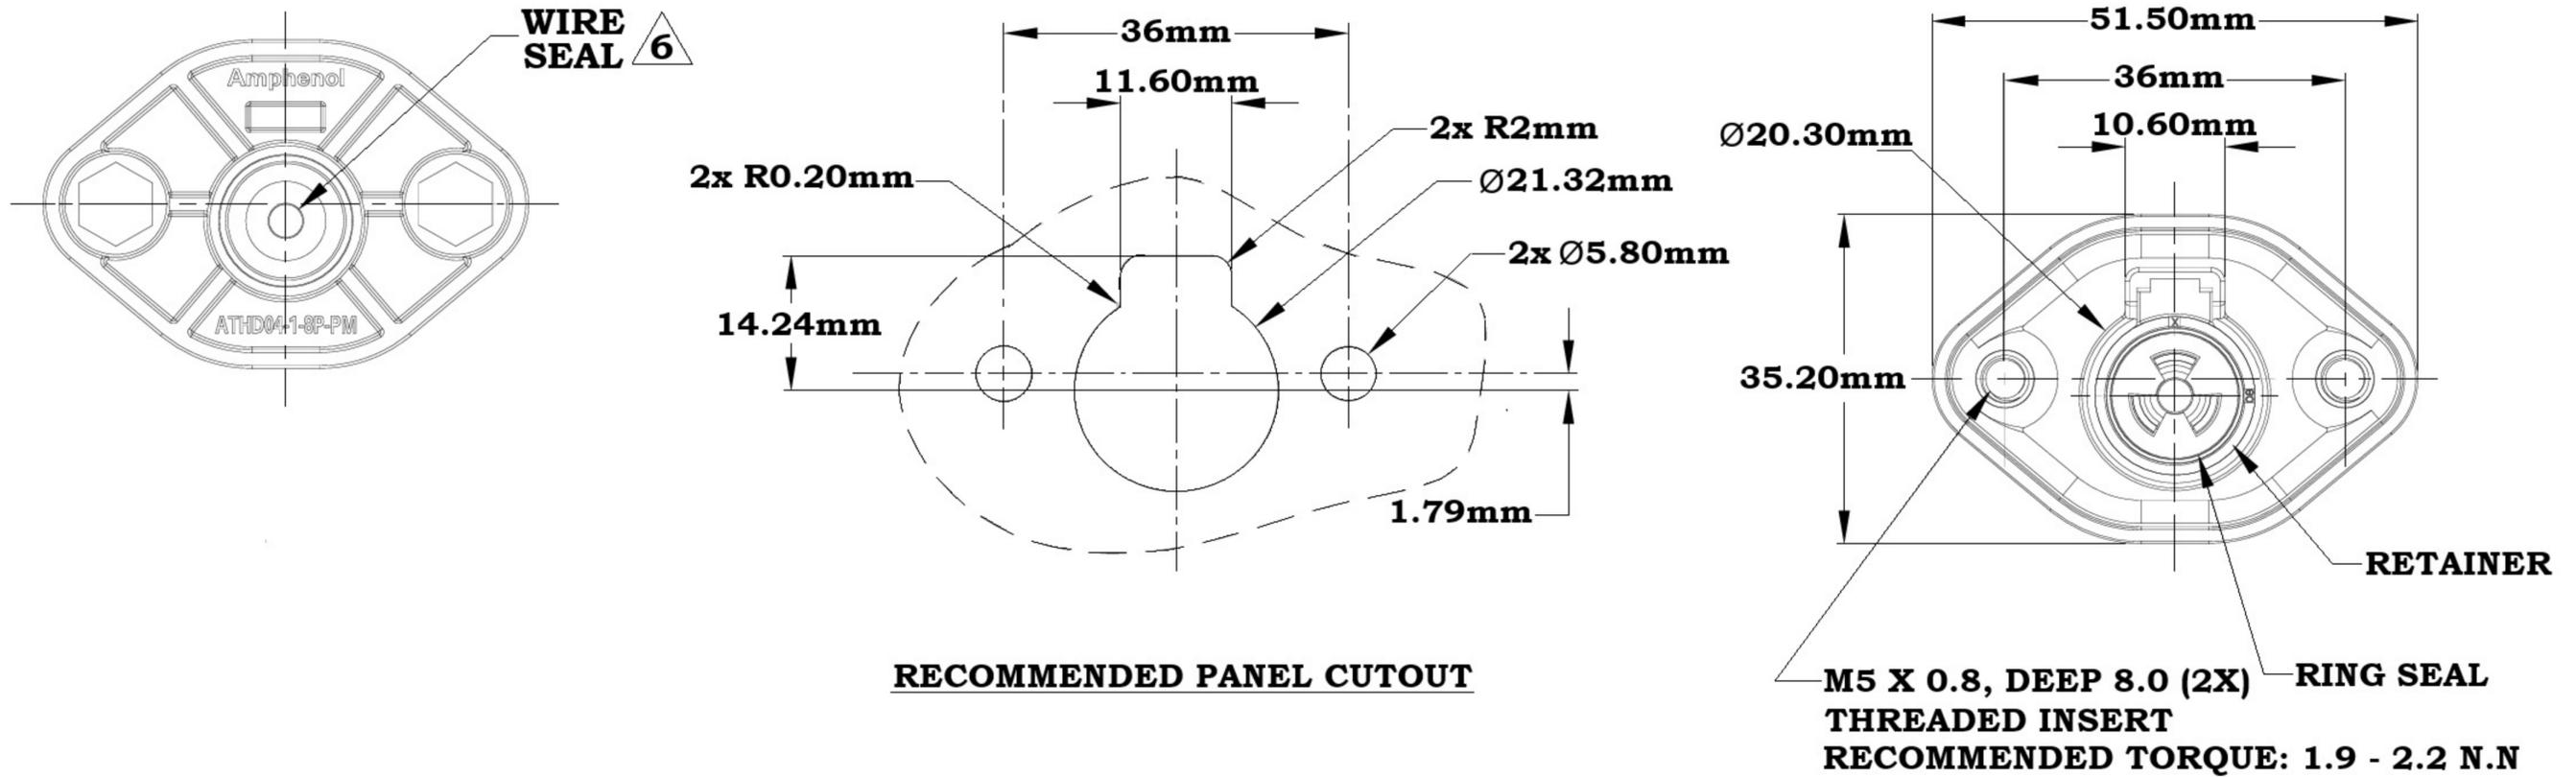

RECOMMENDED PANEL CUTOUT

**M5 X 0.8, DEEP 8.0 (2X) THREADED INSERT
RECOMMENDED TORQUE: 1.9 - 2.2 N.N**

6. CONTACT SIZE AND REAR SEAL WIRE RANGE:

CONTACT SIZE	MIN. INSUL O.D.	MAX. INSUL O.D.	TYPICAL WIRE RANGE
8	4.83mm	6.09mm	8 -10 AWG

